

TT SERIES DRUM PUMPS - MED. VISCOSITY/FLAMMABLES/SANITARY

Pump Tube

- CPVC, 316 SS or USDA 316 SS construction
- 1½" diameter
- 27", 40", or 48" length
- 1" hose barb connection

Electric Motor, TEFC

- 1/4 HP
- 2,850 RPM (50 Hz), 3,450 RPM (60 Hz)
- 115v/1PH
- Totally-Enclosed, Fan-Cooled enclosure
- CSA Certified

Electric Motor, X-Proof


- 1/4 HP
- 2,850 RPM (50 Hz), 3,450 RPM (60 Hz)
- 115v/1PH
- EXP-Class 1, Div. 1, Group D enclosure
- CSA Certified

Air Motor

- 1/2 HP
- 0-6,000 RPM
- 80 PSI @ 25 CFM



Designed for semi-viscous liquids, these sealed units will handle most corrosives, flammables, sanitary and pure applications. Find a motor and tube combination that best suits your material handling needs.

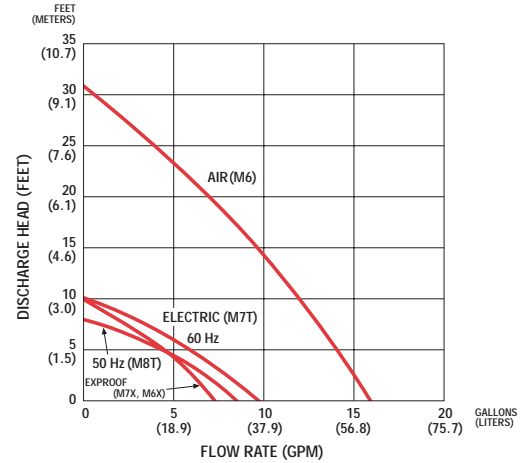

TMS-AS-40 DRUM MIXER

Performance:

- Up to 16 GPM, 30 ft. TDH (see chart)
- Continuous Duty
- Max. Temp.: 150°F
- Max. Specific Gravity: 1.8
- Max. Viscosity: 2,000 cps

Model No.	Tube Const.	Motor Type	Tube Length	Wt. (Lbs.)	Unit Price
TTS-AS-27	316 SS	Air	27"	12	\$ 861.00
TTS-AS-40	316 SS	Air	40"	13	882.00
TTS-AS-48	316 SS	Air	48"	14	949.00
TTS-ET-27	316 SS	TEFC	27"	26	\$ 1,238.00
TTS-ET-40	316 SS	TEFC	40"	27	1,259.00
TTS-ET-48	316 SS	TEFC	48"	28	1,326.00
TTS-XP-27	316 SS	X-Proof	27"	29	\$ 1,530.00
TTS-XP-40	316 SS	X-Proof	40"	30	1,551.00
TTS-XP-48	316 SS	X-Proof	48"	31	1,618.00
TTC-AS-27	CPVC	Air	27"	10	\$ 950.00
TTC-AS-40	CPVC	Air	40"	11	986.00
TTC-AS-48	CPVC	Air	48"	12	1063.00
TTC-ET-27	CPVC	TEFC	27"	24	\$ 1,327.00
TTC-ET-40	CPVC	TEFC	40"	25	1,363.00
TTC-ET-48	CPVC	TEFC	48"	26	1,440.00
TTC-XP-27	CPVC	X-Proof	27"	27	\$ 1,619.00
TTC-XP-40	CPVC	X-Proof	40"	28	1,655.00
TTC-XP-48	CPVC	X-Proof	48"	29	1,732.00

SANITARY PUMPS - USDA APPROVED					
Model No.	Tube Const.	Motor Type	Tube Length	Wt. (Lbs.)	Unit Price
STTS-AS-40	USDA SS	Air	40"	14	\$ 1,511.00
STTS-ET-40	USDA SS	TEFC	40"	28	1,888.00
STTS-XP-40	USDA SS	X-Proof	40"	31	2,180.00

DRUM MIXERS - MED. VISCOSITY					
These sealed 4-blade turbine drum mixers are ideal for mild corrosives, solvents or flammables of light-medium viscosity. Non-aerating, non-vortexing circulation, suspends solids.					
Model No.	Tube Const.	Motor Type	Tube Length	Wt. (Lbs.)	Unit Price
TMS-AS-40	316 SS	Air	40"	17	\$ 938.00
TMS-ET-40	316 SS	TEFC	40"	28	1,315.00
TMS-XP-40	316 SS	X-Proof	40"	31	1,607.00

Warning: For flammable applications or for use in hazardous areas, choose air or electric x-proof motors with static protection kit.